



www.coswick.com

COSWICK

Solid Hardwood Floors

**COSWICK
COATINGS & ADHESIVES**



COSWICK – 20 YEARS OF DEDICATION TO HARDWOOD FLOORING

Since 1995 the hardwood flooring company Coswick has constantly worked on hardwood flooring manufacturing. In the meantime, Coswick deserved recognition all over the world. The company got the massive experience in areas related to the hardwood flooring. We offer this experience to experts and owners of hardwood floors as the system of tested products for every stage of hardwood flooring life-time from the flooring installation and care to its repair and renovation.

All Coswick products are manufactured in-house from the base components of leading chemical corporate groups. Well-balanced formula and our own chemical production ensure the highest quality of primes, adhesives, lacquers and renovation and cleaners for hardwood flooring.

Coswick range of products is not designed solely for our own hardwood flooring. These products shape the group of products for almost all types of hardwood floors and protective-decorative finishes.

Coswick is concerned about the ecological cleanness of its products, implementation of innovations and ease of use. We are working to make your hardwood flooring everlasting and bringing you joy and happiness.



CONTENTS:

MATERIALS FOR ADHESIVE HARDWOOD FLOORING INSTALLATION

Primer

- Primer concentrate Coswick F00 Prime
- Polyurethane primer Coswick F02 Prime

Solvent-based flooring adhesives

- Elastic silane-based hardwood flooring adhesive COSWICK SPU 303
- Two-component polyurethane hardwood flooring adhesive COSWICK PU 2K 205
- Synthetic resin solvent-based hardwood flooring adhesive COSWICK Synt 105

Optional materials for installation

- Tool cleaner
- Heavy duty cleaner for hardwood floors
- Joint
- Hardwood adhesive trowels: Profile B3, B5, B11
- Cork underlay 2 mm
- Flooring underlay Coswick Basic PU AT 240 3 mm
- Flooring underlay Coswick Sport PU 100 15 mm

HARDWOOD FLOORING CARE PRODUCTS

Periodic cleaning

- Cleaner for lacquered hardwood floors
- Cleaner concentrate for lacquered hardwood floors
- Service kit for lacquered hardwood flooring
- Cleaner for oiled and Hardwax-oiled hardwood floors
- Cleaner concentrate for oiled and Hardwax-oiled hardwood floors
- Service kit for oiled and Hardwax-oiled hardwood flooring

Removal of heavy stains

- Heavy duty cleaner for hardwood floors

Wear layer renovation

- Renewer oil for oiled and Hardwax-oiled hardwood floors
- Protective wax for hardwood floors

Optional care products

- Hydrometer
- Felt chair leg floor protection
- Protective rug

LOCAL REPAIR AND RENOVATION PRODUCTS

- Wood stain (47 colors)
- Tinted oil for restoration of oiled and hardwax-oiled hardwood floors (9 colors)
- Wax filler (90 colors)
- Repair kit Profi
- Renewer oil for oiled and Hardwax-oiled hardwood floors
- Protective wax for hardwood floors

PROTECTIVE DECORATIVE COATINGS

Primer

- Water-based acrylic primer for hardwood floors COSWICK F01 PRIME

Water-based finish for hardwood floors

- Water-based polyurethane acrylic finish for hardwood floors COSWICK F11 Home
- Water-based polyurethane finish for hardwood floors COSWICK F21 Hall
- Water-based two-component polyurethane finish for hardwood floors COSWICK F31 High Traffic&Sport

Sports marking paint

- Polyurethane-acrylic sports marking paint COSWICK P71 Sport Marking (4 colors)
- 2K polyurethane sports line marking Paint Coswick P72 Sport Marking (4 colors)

Natural hardwood flooring oils and wax

- Hardwax-Oil for hardwood floors
- Tinted oil for hardwood floors (6 colors)

Outer finish

- Lasur



HARDWOOD FLOORS ADHESIVE INSTALLATION SYSTEMS (ADHESIVE)

SOLID FLOORING INSTALLATION


- On screed with the plywood base (A2 SPU, A2 PU, A2 SY)
- On rough floor (A1 SPU, A1 PU, A1 SY)

ENGINEERED FLOORING INSTALLATION

- On screed without underlay (A1 SPU, A1 PU, A1 SY)
- On screed with underlay (A2 SPU, A2 PU, A2 SY)
- On screed with radiant heat system (warm floor) (A1 SPU, A1 PU)
- On rough floor (A1 SPU, A1 PU, A1 SY)

System	Layout	Primer, concentrate consumption	Adhesive, consumption	Underlayment
A1 SPU		F00 Prime, 0 / 30-70 g/m ² *	SPU 303, 800-1300 g/m ² **	None
A1 PU		F00 Prime, 30-70 g/m ²	PU 2K 205, 900-1300 g/m ²	
A1 SY		F00 Prime, 30-70 g/m ²	Synt 105, 700-1100 g/m ² **	
A2 SPU		F00 Prime, 0 / 30-70 g/m ² *	SPU 303, 1600-2600 g/m ² **	Cork underlay/ Polyurethane underlay/ Plywood
A2 PU		F00 Prime, 30-70 g/m ²	PU 2K 205, 1800-2600 g/m ² **	
A2 SY		F00 Prime, 30-70 g/m ²	Synt 105, 1400-2200 g/m ² **	

* - if the screed used is not loose or dust-forming, SPU 303 does not require the preliminary primer
 ** - adhesive consumption is changed in accordance with the micro- and macrorelief of the base

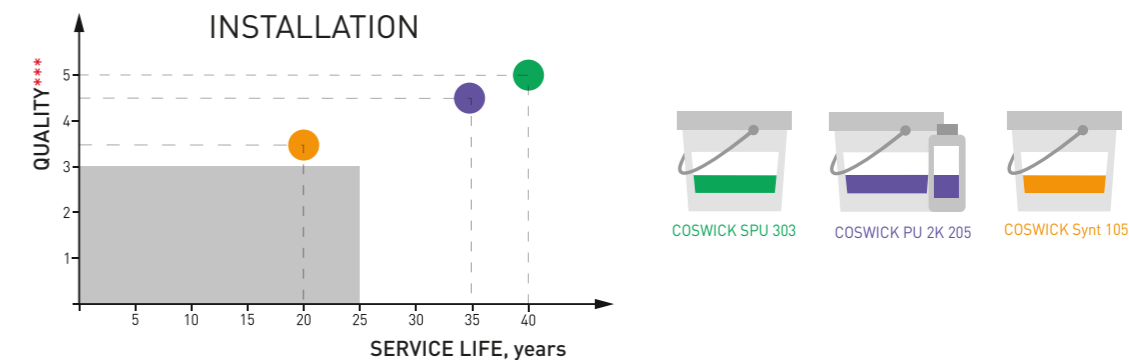

*** - specifications relevant to the axis "QUALITY":
 pull strength, elasticity, ecological cleanness, ease to use.

MATERIALS FOR ADHESIVE HARDWOOD FLOORING INSTALLATION

Primer

- Primer concentrate Coswick F00 Prime
- Polyurethane primer Coswick F02 Prime

Solvent-based flooring adhesives

- Elastic silane-based hardwood flooring adhesive COSWICK SPU 303
- Two-component polyurethane hardwood flooring adhesive COSWICK PU 2K 205
- Synthetic resin solvent-based hardwood flooring adhesive COSWICK Synt 105

Optional materials for installation

- Tool cleaner
- Heavy duty cleaner for hardwood floors
- Joint
- Hardwood adhesive trowels: Profile B3, B5, B11
- Cork underlay 2 mm
- Flooring underlay Coswick Basic PU AT 240 3 mm
- Flooring underlay Coswick Sport PU 100 15 mm



Primer concentrate Coswick F00 PRIME

For mineral porous surfaces

PRODUCT DESCRIPTION

Primer is used to dedust and fortify the porous mineral (concrete, plaster, brick, plasterboard, etc.) and wooden surfaces. It is recommended to apply the primer to the base before gluing the flooring planks, along with facing with ceramic tiles, fixing heat insulating slabs, papering walls and painting.

When applied, the primer penetrates deeply into the base layer pores and, when dried up, creates the matrix that acts as an adhesion frame. Due to this mechanism, the primer allows to achieve:

- the face reinforcement of the base layer;
- the increased adhesion to materials and decrease of their consumption (adhesives, paint, plaster, wallpapers, etc.);
- the protection of the surface from the adverse impact of fungi and mould. This is particularly important when finishing walls and floors.

The primer is an eco-clean water-based polymer dispersion with the special antiseptic and antifungal additives.

Primer is used for indoor and outdoor works.

METHOD OF APPLICATION

Important! Before using, dilute the primer concentrate in 1:3 ratio.

Remove old coatings (paint, wallpapers, dirt, etc.), if any.

Apply the primer with a brush, applicator roll or a spray gun at the base layer at the air temperature not less than +5 °C and not more than +30 °C.

Loose surfaces shall be primed twice within at least 2 hours.

Recommended consumption: 120 - 280 g/m².

Time to dry: 1 - 2 hours at T = +20 °C.

Tools cleaning: Tools are easily cleaned with water.

BENEFITS:

- Increases the adhesion strength of the surface with adhesive and finishing products (adhesives, paint, wallpapers, etc.);
- Smooths the absorbing surface of the base layer to improve the quality of the following finish;
- Reinforces the base layer;
- Contains an antiseptic additive against the mould and fungi.
- Does not contain solvents;
- Fire-safe and explosion-proof.

MEETS THE REQUIREMENTS OF CTБ 1263-2001 STANDARD

COMPOSITION: water, acrylic dispersion, cosolvent and functional additives.

PACKING: Jerrycan 2.5 kg, 5 kg, 10 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 12 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed at temperature from +5 °C to +25 °C. Keep container dry. Avoid exposure of direct sunlight and cold.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin and mucous membranes. Keep out of the reach of children. Primer is fire- and combustible-safe and nontoxic.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Polyurethane primer Coswick F02 PRIME

Polyurethane resin-based primer

PRODUCT DESCRIPTION

Primer is designed to fortify the porous mineral surfaces (concrete, plaster, brick, plasterboard, etc.) when installing the hardwood flooring with any type of adhesives.

METHOD OF APPLICATION

The base shall be dry and cleaned from dust and other impurities. Remove old coatings (paint, wallpapers, dirt, etc.), if any.

Apply the primer with an applicator roll or a trowel at the base layer at the air temperature not less than +5 °C and not more than +30 °C.

Loose surfaces shall be primed twice within at least 2 hours.

Flooring shall be glued not later than 48 hours after priming.

Recommended consumption: 100-150 g/m², one layer.

Time to dry: 2 hours at t = +20 °C.

Tools cleaning: Tools are easily cleaned with acetone.

BENEFITS:

- Reinforces the base layer;
- Does not contain water and solvents;
- Increases the adhesive strength to a flooring adhesive and decreases its consumption.

MEETS THE REQUIREMENTS OF CTБ 1263-2001 STANDARD

COMPOSITION: modified polyurethane prepolymer.

PACKING: Jerrycan 6 kg, 12 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Coswick SPU 303 Elastic 1-component silane-based flooring adhesive

Coswick SPU 303 - Elastic 1-component silane-based flooring adhesive

FIELD OF APPLICATION

Adhesive is designed for installation of all types of wooden floorings: uniblock flooring, solid hardwood plank, two- and three-layer hardwood plank, mosaic and module floorings, industrial hardwood floors. It is used for hardwood planks without joint, with tongue-groove and lock joints, without any limitations in thickness, width or length. Recommended to use with any wood species, including exotic ones. Can be used to glue the hardwood flooring without decorative protective coating and with the industrial finish, oil or wax coating.

BASE REQUIREMENTS

It is allowed to use the adhesive on the following bases: prepared concrete surface, cement screed, sulphate-calcium screed, ceramic tile, plywood, chipboard, rough board floor, synthetic or cork subfloors and similar bases.

Bases shall be firm and even, solid, clean, dry, dedusted and degreased. Paint, fat stains and other weak coatings shall be removed.

When applying the coating, the surface humidity shall not exceed 4%.

BENEFITS

- Ready for application, does not mostly require preparation or stirring;
- Can be easily levelled with trowel, keeps the stack;
- Does not contain solvent, odourless;
- Highly adhesive, suitable for any base, does not require the priming of the base;
- Fast hardening, the flooring can be sanded in 12 hours;
- Moisture-resistant, provides an additional moisture proof of the base;
- Provides perfect sound and vibration proof;
- High shear strength, good compensation of stress in solid hardwood flooring caused by the impact of humidity;
- Does not lose its elastic properties in the course of time and under the temperature;
- Can be used on radiant heat underfloor systems.

MEETS THE REQUIREMENTS OF DIN EN 14293, СТБ 1621-2006, ISO 17178 STANDARD

Specifications	Value
Density	~1500 kg/m ³
Hardness	~60 Shore A
Color	Beige
Consumption	800 - 1300 g/m ²
Film forming time	60 min at t=20 °C
Fluidity:	Not less than 50 mm, EN 14293 Height of the glue line edge
Dry-out time:	
for light loads (walking)	8 hours at t= 23 °C and the relative humidity of 50 %
for sanding	12 hours at t= 23 °C and the relative humidity of 50 %
To final solidity	7 days at t= 23 °C and the relative humidity of 50 %
Exploitation temperature	from +5 °C to +25 °C
Shearing strength	~ 1,7 MPa at t= 23 °C and the relative humidity of 50 %
Tensile strength	~ 1,7 MPa at t= 23 °C and the relative humidity of 50 %
Elongation at break	~ 100 % at t= 23 °C and the relative humidity of 50 %



Coswick PU 2K 205 2-Component PU flooring adhesive

Coswick 2K PU 205 – waterless two-component solid-elastic PU hardwood flooring adhesive

FIELD OF APPLICATION

Adhesive is designed for installation of all types of wooden floorings: uniblock flooring, solid hardwood plank, two- and three-layer hardwood plank, mosaic and module floorings, industrial hardwood floors. It is used for hardwood planks without joint, with tongue-groove and lock joints, without any limitations in thickness, width or length. Recommended to use with any wood species, including exotic ones. Can be used to glue the hardwood flooring without decorative protective coating and with the industrial lacquer, oil or wax coating.

BASE REQUIREMENTS

It is allowed to use the adhesive on the following bases: prepared concrete surface, cement screed, sulphate-calcium screed, ceramic tile, plywood, chipboard, rough board floor, synthetic or cork subfloors and similar bases.

Bases shall be firm and even, solid, clean, dry, dedusted and degreased. Paint, fat stains and other weak coatings shall be removed.

When applying the coating, the surface humidity shall not exceed 4%.

BENEFITS

- Can be easily levelled with trowel, keeps the stack;
- Does not contain solvents, has the weak odour;
- Highly adhesive, suitable for any base;
- Fast hardening, the flooring can be sanded in 12 hours;
- Moisture-resistant and durable, can be used with exotic wood species;
- Does not lose its elastic and strength properties in the course of time and under the temperature;
- Can be used on radiant heat underfloor systems.

MEETS THE REQUIREMENTS OF DIN EN 14293, СТБ 1621-2006, ISO 17178 STANDARD

Specifications	Value
Density	~1500 kg/m ³
Hardness	~80 Shore A
Color	Beige
Consumption	900 - 1300 g/m ²
Film forming time	45 min at t= 20 °C
Fluidity:	Not less than 50 mm, EN 14293 Height of the glue line edge
Dry-out time:	
for light loads (walking)	8 hours at t= 23 °C and the relative humidity of 50 %
for sanding	12 hours at t= 23 °C and the relative humidity of 50 %
To final solidity	7 days at t= 23 °C and the relative humidity of 50 %
Exploitation temperature	from +5 °C to +25 °C
Shearing strength	~ 1,7 MPa at t= 23 °C and the relative humidity of 50 %
Tensile strength	~ 1,7 MPa at t= 23 °C and the relative humidity of 50 %
Elongation at break	~ 2,5% at t= 23 °C and the relative humidity of 50 %



COMPOSITION: Silane-modified polyurethane resin, mineral fillers, functional additives.

PACKING: Bucket 15 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 12 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed at temperature from +5 °C to +25 °C. Keep container dry. Avoid exposure of direct sunlight and cold.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin and mucous membranes. Wear suitable rubber gloves when using the adhesive. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

COMPOSITION: Polyurethane resin, mineral fillers, functional additives.

PACKING: Two pieces kit: piece A - bucket 10 kg, piece B - bottle 1,2 kg (variant 1); piece A - bucket 5 kg, piece B - bottle 0,6 kg (variant 2).

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 12 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed at temperature from +5 °C to +25 °C. Keep container dry. Avoid exposure of direct sunlight and cold.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin. Wear suitable rubber gloves when using the adhesive. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Coswick Synt 105

Synthetic Resin Solvent-based flooring adhesive

Coswick SYNT 105 - Synthetic resin waterless single-component solid-elastic solvent-based flooring adhesive

FIELD OF APPLICATION

Adhesive is used for installation of wooden flooring: uniblock flooring, two and three-layer flooring plank, mosaic and module hardwood floors, engineered flooring; without joint, with tongue-groove or lock joints, with the width of flooring planks up to 22 mm. It is used for flooring planks without joint, with tongue-groove and lock joints. It is recommended to use the adhesive with any wood species, excluding exotic ones.

Can be used to glue the hardwood flooring without decorative protective coating and with the industrial lacquer, oil or wax finish.

BASE REQUIREMENTS

It is allowed to use the adhesive on following bases: prepared concrete surface, cement screed, sulphate-calcium screed, ceramic tile, plywood, chipboard, rough board floor, synthetic or cork underlays and similar bases.

Bases shall be firm and even, solid, clean, dry, dedusted and degreased. Paint, fat stains and other weak coatings shall be removed. When applying the finish, the surface humidity shall not exceed 4 %.

BENEFITS

- Ready for application, does not require preliminary preparation;
- Can be easily levelled with trowel, keeps the stack;
- Waterless;
- Highly adhesive, suitable for most bases;
- High shearing strength;
- Family package 25 kg;
- Non-used adhesive can be stored and used later.

MEETS THE REQUIREMENTS OF DIN EN 14293, СТБ 1621-2006, ISO 17178 STANDARD

Specifications	Value
Density	~1400 kg/m ³
Hardness	~80 Shore A
Color	Beige
Consumption	700 - 1100 g/m ²
Film forming time	20 min at t=20 °C
Fluidity:	Not less than 35 mm, EN 14293 Height of the glue line edge
Dry-out time:	
for light loads (walking)	24 hours at t=23 °C and the relative humidity of 50 %
for sanding	48 hours at t=23 °C and the relative humidity of 50 %
To final solidity	7 days at t=23 °C and the relative humidity of 50 %
Exploitation temperature	from +5 °C to +25° C
Shearing strength	~ 1,6 MPa at t= 23 °C and the relative humidity of 50 %
Tensile strength	~ 1,6 MPa at t= 23 °C and the relative humidity of 50 %



Tool cleaner

FIELD OF APPLICATION

This product is designed to clean different tools:

- flooring finish tools (trowels, coating thickness gauges, scrapers, masonry and finishing trowels, grout trowels, finishing trowel, mixer head, etc.);
- painting tools (brushes, rollers, paint and adhesive trays, etc.).

Impurities to be removed:

- all types of adhesives, lacquer, adhesive tape, sealant, putty, lubricants, silicone, permanent marker, felt-tip pens, oil and grease stains, and others;
- fresh and consolidated impurities.

METHOD OF APPLICATION

Important! Ready to use, does not have to be dissolved.

1. Apply the cleaner to a lint-free napkin and soak the impure area of the surface or a tool. Remove the dirt with napkin after a time. If necessary, apply the cleaner again. 2. Apply the cleaner to the impure surface or tool. Remove the dirt with the napkin after a time. 3. You can clean tools by dipping them into the adhesive cleaner. Wipe tools clean with the dry napkin. Repeat, if necessary.

MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD



COMPOSITION: Solvent.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 24 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed in a cool dry place. Storage temperature: +5 °C to +25 °C.

SAFETY REQUIREMENTS: Flammable! Inflammable liquid! For intended use only. Avoid contact with mucous membranes. Wear suitable rubber gloves. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Heavy duty cleaner for hardwood floors

FIELD OF APPLICATION

Product is designed to clean hardwood flooring with any finish from substantial impurities. Impurities that can be removed: heavy stains; oil stains; food stains; marks of a felt-tip pen, adhesive tape, marker, etc. It is possible to use the product to remove impurities, if any, from different surfaces (plastic, metal, ceramic, glass, wooden and washable wallpapers).

METHOD OF APPLICATION:

Clean the hardwood flooring from dust and litter using a vacuum-cleaner. Apply the product to the stain on the flooring or any other surface using a spray gun or rags. Wipe the floor or any other prepared surface with a Coswick microfibre mop or with clean rags thoroughly, removing the product. When thoroughly wiped with the Coswick microfibre mop, the flooring should stay almost dry. When the floor is dry, the flooring with the Coswick cleaner.

BENEFITS

- Ready for application, does not require preliminary preparation;
- Effective and gentle;
- Contains natural detergents;
- Attractive citrus scent.

MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD



COMPOSITION: Modified PVA-resin, solvent, mineral fillers, functional additives.

PACKING: Bucket 14 kg, 25 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 12 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed at temperature from +5 °C to +25 °C. Keep container dry. Avoid exposure of direct sunlight and cold.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin. Wear suitable rubber gloves when using the adhesive. Keep out of the reach of children. Flammable.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

COMPOSITION: water, PAV, perfume and functional additives.

VOLUME: 1 l. Quantity in a pack: 9 pcs.

SAFETY MEASURES: For intended use only. Avoid contact with mucous membranes. Keep out of the reach of children. Flammable.

EXPIRY DATE AND STORAGE CONDITIONS: Flammable! Expiry date: 24 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed in a cool dry place. Storage temperature: +5 °C to +25 °C.

Optional materials for installation

Trowel B3, Trowel B5, Trowel B11

FIELD OF APPLICATION

To apply flooring adhesives, Coswick recommends to use three types of professional trowels. Following the results of a practical research company experts chose trowel profiles recommended by TKB (German Technical Committee on adhesives) - B3, B5 and B11 with the profile width of 220 mm. Coswick trowel is a processed steel plate with a wooden handle. The plate has a neatly cut profile and an aperture to hang the trowel when keeping.

Selection of the corresponding trowel profile depends upon the type and macrorelief of a base, glued surface and used adhesive.

NOTCHED TROWEL B3

It is designed to apply adhesive on even (maximal unevenness is 2 mm for 2 meters in length) and smooth surfaces (filled with putty or screed smoothed with a self-levelling floor compound; brushed plywood or chipboard underlay). Underlay, laminate flooring and stable types of hardwood flooring can be used as a glued flooring. This trowel ensures the adhesive consumption of 800 - 1000 g/m².

NOTCHED TROWEL B5

It has the same field of application, but allows for bigger bumps (up to 4 mm for 2 meters in length). This trowel ensures the adhesive consumption of 800 - 1000 g/m².

NOTCHED TROWEL B11

It allows to glue all aforementioned flooring types, as well as a large-size solid flooring and hardwood flooring planks made from exotic wood species on bases with bumps up to 4 mm for 2 meters in length. It can also be used in combination with basic materials and even base to achieve the high strength. This trowel ensures the adhesive consumption of 1000 - 1300 g/m².



Joint filler

PRODUCT DESCRIPTION AND FIELD OF APPLICATION

Joint filler for hardwood and laminate flooring is based on natural oils and wax. Protects the flooring from moisture.

METHOD OF APPLICATION

Preliminary works: After the installation, it is recommended to remove stains and adhesive residues with Coswick heavy duty cleaner for hardwood floors.

Shake before using.

Application: It is recommended to apply Coswick filler in a thin layer on joints using a plastic trowel. Remove the residues of filler with rags. Keep in mind that the flooring surface shall be free from the filler residues. The filler shall be applied on joints only. It is not recommended to load the flooring during the first 12 hours.

Consumption: 5 - 10 ml/m².

Time to dry: 24 hours.

Tools cleaning: Tools and dry filler remains can easily be cleaned with white spirit.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Modified natural oil, wax, solvent.

VOLUME: 0,25 l.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! For intended use only. Avoid contact with skin and mucous membranes. To prevent the spontaneous combustion, keep the filler-soaked rags in tightly closed metal containers or under the water. Keep out of the reach of children.

DISPOSAL: After using, seal the empty container and dispose as a domestic garbage.

Flooring Underlay Coswick Basic PU AT 240 3 mm

for installation of flooring (hardwood flooring, laminate, carpeting)

FIELD OF APPLICATION

It is used as an intermediate layer with glued or floating flooring, laminate or carpet flooring installation on the dry base to provide the soundproofing of 34 dB, heat insulation of 0,12 m² K/W, as well as to compensate the base microroughness up to 2,5 mm.

Description: Underlay Coswick Basic PU AT 240 provides a good insulation of wide-band noise, including household impact noises. The base of this underlay is a polyurethane elastomer foam with addition of microfractions of different density. The material has good heat-insulation properties. It compensates the surface microroughness. Due to the open-pore structure, it has the low residual movement and high durability. The underlay is an eco-safe material.

Safety guidelines: Exempt from labelling in accordance with the European Union regulation concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (EC) 1907/2006.

SHELF LIFE AND STORAGE CONDITIONS: Expiry date: 12 months. Keep the container intact. Storage and transportation temperature is from minus 30 °C, average humidity - 40 - 60 %. Keep away from direct sunlight, at the distance of more than 1 m from heating surfaces (on long storage).


Dimensions: 3 x 1000 x 2000 mm.

Packing: 5 sheets in reel. Area: 10 m².

Eco-safe product.

BENEFITS:

- Good soundproof and insulation properties;
- Compensates the base hairline cracks;
- Minimal residual movement;
- Eco-friendly and durable material.



Flooring Underlay Coswick Sport PU 100 15 mm

for installation of sports flooring (sports flooring, sound-absorbing floors)

FIELD OF APPLICATION

It is used as an intermediate layer with glued or floating sports flooring or soundproofing flooring installation on the dry base to provide the soundproofing of 64 dB, heat insulation of 0,32 m² K/W, as well as to compensate the base microroughness up to 7 mm.

Description: Underlay Coswick Sport PU 100 is a material that was designed specifically for sports and noise-absorbing floorings. To ensure the optimal characteristics, it is recommended to get approval for the project report from "Coswick" company experts. The material has good heat-insulation characteristics. It compensates the surface microroughness. Due to the open-pore structure, it has the low residual movement and high durability. The underlay is an eco-safe material.

Safety guidelines: Exempt from labelling in accordance with a European Union regulation concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (EC) 1907/2006.

SHELF LIFE AND STORAGE CONDITIONS: Expiry date: 12 months. Keep the container intact. Storage and transportation temperature is from minus 30 °C, average humidity - 40 - 60 %. Keep away from direct sunlight, at the distance of more than 1 m from heating surfaces (on long storage).

Dimensions: 15 x 1000 x 2000 mm.

Packing: 10 sheets in reel. Area: 20 m².

Eco-safe product.

BENEFITS:

- Custom designed for sports flooring;
- Good soundproof and insulation properties;
- Compensates the base hairline cracks;
- Minimal residual movement;
- Eco-friendly and durable material.



Cork underlay 2 mm

for installation of flooring (hardwood and laminated floorings)

FIELD OF APPLICATION

It is used as an intermediate layer with glued or floating flooring, laminate flooring installation on the dry base to provide the soundproofing of 17 dB, heat insulation of 0,04 m² K/W, as well as to compensate the base microroughness up to 1,2 mm.

Safety guidelines: Exempt from labelling in accordance with the European Union regulation concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (EC) 1907/2006.

SHELF LIFE AND STORAGE CONDITIONS: Expiry date: 12 months. Keep the container intact. Storage and transportation temperature is from minus 30 °C, average humidity - 40 - 60 %. Keep away from direct sunlight, at the distance of more than 1 m from heating surfaces (on long storage).

Dimensions: 1,8 x 1000 x 10 000 mm.

Packing: 1 sheet in reel. Area: 10 m².

Eco-safe product.



CLEANING AND CARE SYSTEMS (CLEANING)

LACQUER FLOORING CARE SYSTEMS

- Essential set of products (**CH MINI**)
- Custom set of products (**CH KIT**)
- Consumables in an ergonomic package (**CH ECON**)

OIL AND HARDWAX-OILED FLOORING CARE SYSTEMS

- Essential set of products (**CS MINI**)
- Custom set of products (**CS KIT**)
- Consumables in an ergonomic package (**CS ECON**)

System	Layout	Cleaner, consumption **	Condensed cleaner, consumption **	Wear layer renovation, consumption	Accessories
CH MINI		Cleaner for lacquered hardwood floors (flask 0,5 l with trigger allows finishing 210 m ²)		Not applicable	
CH KIT *		Cleaner for lacquered hardwood floors (flask 0,5 l with trigger allows finishing 210 m ²)			Floor mop, replacement mop
CH ECON		Heavy duty cleaner for hardwood floors (used for the removal of heavy local impurities)	Cleaner concentrate for lacquered hardwood floors (flask 1 l with trigger allows finishing 21 000 m ²)		Floor mop, replacement mop
CS MINI		Cleaner for oiled and hardwax-oiled hardwood floors (flask 0.5L with trigger allows finishing 210 m ²)			
CS KIT *		Cleaner for oiled and hardwax-oiled hardwood floors (flask 0,5 l with trigger allows finishing 210 m ²)			Floor mop, replacement mop
CS ECON		Heavy duty cleaner for hardwood floors (used for the removal of heavy local impurities)	Cleaner concentrate for oiled and hardwax-oiled hardwood floors (flask 1 l with trigger allows finishing 21 000 m ²)	Protective wax for hardwood floors (used for rapid renovation of flooring areas; enough for several years) Renewer oil for oiled and hardwax-oiled hardwood floors - regular renovation of wear layer on the flooring surface (0,75 l jar allows finishing 42 m ²)***	Floor mop, replacement mop

* - supplied as a set in pack

** - consumption is greatly varied depending on the impurities grade (kitchen - study), recommended cleaning rate is 4-7 days

*** - UV-oil care rate - once in 3-5 years, hard wax - once in 1-2 years

HARDWOOD FLOORING CARE PRODUCTS

Regular cleaning

- Cleaner for lacquered hardwood floors
- Cleaner concentrate for lacquered hardwood floors
- Service kit for lacquered hardwood flooring
- Cleaner for oiled and hardwax-oiled hardwood floors
- Cleaner concentrate for oiled and hardwax-oiled hardwood floors
- Service kit for oiled and hardwax-oiled hardwood floors

Removal of heavy stains

- Heavy duty cleaner for hardwood floors

Wear layer renovation

- Renewer oil for oiled and hardwax-oiled hardwood floors
- Protective wax for hardwood floors

Optional care products

- Hydrometer
- Felt chair leg floor protection
- Protective rug



Cleaner for lacquered hardwood floors

FIELD OF APPLICATION

Cleaner is designed for the constant maintenance of hardwood and laminated flooring, UV-, water- or polyurethane lacquered flooring and furniture. Neutral pH ensures the minimal risk of color change, creates the protective film, increases the protection time of finish. Perfectly removes fat stains and dirt. Non-abrasive, does not leave stains. Has a delicate aroma. Ready to use.

METHOD OF APPLICATION

Important. Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Apply the cleaner to the mop, using the spray gun. Wipe the flooring thoroughly along the blocks, using Coswick microfibre mop.

When applying the cleaner, avoid the overwatering of the hardwood flooring surface. When thoroughly wiped with the microfibre Coswick mop the hardwood flooring should stay almost dry.

Consumption: 0,5 l to 210 m² surface.



MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD

COMPOSITION: Water, PAV, perfume and functional additives.

VOLUME: 0,5 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed in a cool dry place, keep away from the cold. The expiry date is 24 months from the manufacturing date if meeting these requirements.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with mucous coats. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Cleaner concentrate for lacquered hardwood floors

FIELD OF APPLICATION

Cleaner concentrate is designed to make Coswick cleaner for the constant maintenance of hardwood, laminated and wooden flooring, UV-, water- or polyurethane lacquered flooring and furniture. Dilute the cleaner concentrate in 1:50 ratio (i.e. 10 ml for 0,5 l of water). Neutral pH ensures the minimal risk of color change, creates the protective film, increases the protection time of finish. Perfectly removes fat stains and dirt. Non-abrasive, does not leave stains. Has a delicate aroma.

METHOD OF APPLICATION

Important! Before using dilute as required.

Dilute the cleaner concentrate in 1:50 ratio (i.e. 10 ml for 0,5 l of water).

Clean the floor from dust and litter using a vacuum-cleaner. Apply the cleaner to the mop, using the spray gun. Wipe the flooring thoroughly along the blocks, using Coswick microfibre mop.

When applying the cleaner, avoid the overwatering of the hardwood flooring surface. When thoroughly wiped with the microfibre Coswick mop the hardwood flooring should stay almost dry.

Consumption: 1 l to 21000 m² surface.



MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD

COMPOSITION: Water, PAV, perfume and functional additives.

VOLUME: 1 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed in a cool dry place, keep away from the cold. The expiry date is 24 months from the manufacturing date if meeting these requirements.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with mucous membranes. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Cleaner for oiled and hardwax-oiled hardwood floors

FIELD OF APPLICATION

Product is designed for the constant maintenance of hardwood and wooden flooring, and UV-oil, oil or wax finished furniture. Neutral pH ensures the minimal risk of color change, creates the protective film, increases the protection time of finish. Perfectly removes fat stains and dirt. Non-abrasive, does not leave stains. Has a delicate aroma. Ready to use.

METHOD OF APPLICATION

Important. Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Apply the cleaner to the mop, using the spray gun. Wipe the flooring thoroughly along the blocks, using Coswick microfibre mop.

When applying the cleaner, avoid the overwatering of the hardwood flooring surface. When thoroughly wiped with the microfibre Coswick mop the hardwood flooring should stay almost dry.

Consumption: 0,5 l to 210 m² surface.



MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD

COMPOSITION: Water, PAV, perfume and functional additives.

VOLUME: 0,5 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed in a cool dry place, keep away from the cold. The expiry date is 24 months from the manufacturing date if meeting these requirements.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with mucous coats. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Cleaner concentrate for oiled and hardwax-oiled hardwood floors

FIELD OF APPLICATION

Cleaner concentrate is designed to make Coswick cleaner for the constant maintenance of hardwood and wooden flooring, and UV-oil, oil or wax finished furniture. Dilute the cleaner concentrate in 1:50 ratio (i.e. 10 ml for 0,5 l of water). Neutral pH ensures the minimal risk of color change, creates the protective film, increases the protection time of finish. Perfectly removes fat stains and dirt. Non-abrasive, does not leave stains. Has a delicate aroma.

METHOD OF APPLICATION

Important! Before using dilute as required.

Dilute the cleaner concentrate in 1:50 ratio (i.e. 10 ml for 0,5 l of water).

Clean the floor from dust and litter using a vacuum-cleaner. Apply the cleaner to the mop, using the spray gun. Wipe the flooring thoroughly along the blocks, using Coswick microfibre mop.

When applying the cleaner, avoid the overwatering of the hardwood flooring surface. When thoroughly wiped with the microfibre Coswick mop the hardwood flooring should stay almost dry.

Consumption: 1 l to 21000 m² surface.



MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD

COMPOSITION: Water, PAV, perfume and functional additives.

VOLUME: 1 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed in a cool dry place, keep away from the cold. The expiry date is 24 months from the manufacturing date if meeting these requirements.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with mucous membranes. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Coswick service kit

FIELD OF APPLICATION

Designed to maintain the lacquered, oiled and hardwax-oiled hardwood flooring.

Replacement Mop:

- perfectly gathers dust;
- absorbs moisture;
- has a long service life;
- suitable for machine wash.

Ready-to-use cleaner:

- for periodic cleaning of hardwood flooring;
- perfectly removes fat stains and dirt;
- supplied for lacquered, oiled and hardwax-oiled flooring;
- non-abrasive, does not leave stains;
- has a delicate aroma.



Optional care products:

Hydrometer



It is designed to detect the air humidity level in rooms.


Felt chair leg floor protection

Color: white, black, sandy.



Felt chair leg linings are used on chairs, wing-chairs, tables and other movable furniture legs to increase the service life of the flooring.

Protective rug



Protective rug is an universal protection of any flooring in areas of intense exploitation (mechanical impact of swivel chairs and chairs' legs).

Heavy duty cleaner for hardwood floors

FIELD OF APPLICATION

Cleaner is designed to clean hardwood flooring with any finish from substantive impurities.

Impurities that can be removed: heavy stains; oil stains; wine, coffee, tea and other food stains; marks of a felt-tip pen, adhesive tape, marker, etc.

It is possible to use the product to remove impurities, if any, from different surfaces (plastic, metal, ceramic, glass, wooden and washable wallpapers).

METHOD OF APPLICATION

Important: Ready to use, does not have to be dissolved.

Avoid the overwatering of hardwood flooring!

1. Clean the hardwood flooring from dust and litter using a vacuum-cleaner. 2. Apply the product to the stain on the flooring or any other surface using a spray gun or rags. 3. Wipe the floor or any other prepared surface with a microfibre mop "Coswick" or with clean rags thoroughly, removing the product. When thoroughly wiped with the microfibre mop "Coswick", the flooring should stay almost dry. 4. When the floor is dry, finish the flooring with Coswick hardwood flooring cleaner.



MEETS THE REQUIREMENTS OF TY BY 101040134.003-2014 STANDARD

COMPOSITION: water, PAV, perfume and functional additives.

VOLUME: 1 l. Quantity in a pack: 9 pcs.

SAFETY MEASURES: Flammable! For intended use only. Avoid contact with mucous membranes. Keep out of the reach of children.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 24 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed in a cool dry place. Storage temperature: +5 °C to +25 °C.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.

Renewer oil for oiled and hardwax-oiled hardwood floors

FIELD OF APPLICATION

Oil for oiled and hardwax-oiled floors renovation is developed specifically for periodic renovation of hardwood flooring, furniture, stairs, wall panels finished with any oil-containing finishes (natural oils, hardwax-oil, UV-oil) and restoration of protective properties.

METHOD OF APPLICATION

Important: Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Clean the floor with the oil and hard wax-covered flooring cleaner and leave until completely dry. Stir the oil jar thoroughly.

Manual application: Apply the oil to the renovated flooring surface with a resin trowel. When applied, rub the oil with clean, non-colored rags, remove the oil excess with rags to avoid heavy stains and beads.

Mechanical application: Apply the oil to the renovated flooring surface with a resin trowel. It is recommended to use a single-disk white pad buffing machine. Rub the floor using the buffing machine.

Oil consumption: 5 - 10 ml/m² of flooring surface.

Drying time: 12 hours in ventilated room. Time before using floors not less than 24 hours. Maximal protective characteristics are available in a week.

Tools cleaning: Tools and dry oil remains can easily be cleaned with white spirit.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Natural oil, wax, desiccants, solvent.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! Avoid contact with mucous membranes. Wear suitable rubber gloves when using the oil. If underventilated, use a respiratory protection. Avoid release to the environment. Do not inhale oil fumes. For intended use only. Keep out of the reach of children. Dry film is safe and non-toxic.

DISPOSAL: Dispose of the preliminary water-soaked rags with oil remains in the tightly closed container.

Protective wax for hardwood floors

FIELD OF APPLICATION

Protective wax for oiled and hardwax-oiled floors renovation is developed for regular and periodic renovation of hardwood flooring finished with any oil-containing finishes (natural oils, hardwax-oil, UV-oil).

METHOD OF APPLICATION

Important! Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Clean the floor with the oil and hard wax-covered flooring cleaner and leave until completely dry. Stir the wax jar thoroughly. Apply the wax to the renovated flooring surface with clean rags.

Manual application: When applied, rub the wax with clean, non-colored rags, remove the wax excess with rags to avoid heavy stains and beads.

Mechanical application: It is recommended to use a single-disk white pad buffing machine. Rub the floor using the buffing machine.

Wax consumption: 5 - 10 ml/m² of surface.

Drying time: 1 - 2 hours in ventilated room. Time before using floors is not less than 6 hours.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Natural waxes, aliphatic hydrocarbons.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! Avoid contact with mucous membranes. Wear suitable gloves when using wax for hardwood flooring protection. If underventilated, wear respiration protective equipment. Avoid release to the environment. Do not inhale wax fumes. For intended use only. Keep out of the reach of children. Dry film is safe and non-toxic.

DISPOSAL: Dispose of the preliminary water-soaked rags with wax remains in the tightly closed container.



LOCAL REPAIR AND RENOVATION SYSTEMS (RENOVATION)

LACQUERED FLOORING REPAIR SYSTEMS

- Scratches and small dents renovation (**RH SCRATCH**)
- Renovation of small wear areas with partitive removal of finish (**RH WEAR**)
- Renovation of damaged areas of a single board in size (**RH AREA**)

OILED AND HARDWAX-OILED FLOORING REPAIR SYSTEMS

- Scratches and small dents renovation (**RS SCRATCH**)
- Renovation of small wear areas with partitive removal of finish (**RS WEAR**)
- Renovation of damaged areas of a single board in size (**RS AREA**)

System	Layout	Filling	Tone	Protective layer
RH SCRATCH		Wax filler (color-matching)		
RH WEAR			Wood stain	Repair kit Profi
RH AREA		Color-matching flooring board (removal of a damaged board and its replacement with a new one)		
RS SCRATCH		Wax filler (color-matching)		Protective wax for hardwood floors
RS WEAR		Wax filler (color-matching)	Tinted oil for restoration of oiled and hardwax-oiled hardwood floors	Renewer oil for oiled and hardwax-oiled hardwood floors
RS AREA		Repair kit Profi/ Color-matching flooring board	Tinted oil for restoration of oiled and hardwax-oiled hardwood floors	Renewer oil for oiled and hardwax-oiled hardwood floors

LOCAL REPAIR AND RENOVATION PRODUCTS

- Wood stain (47 Colors)
- Tinted oil for restoration of oiled and hardwax-oiled hardwood floors (9 Colors)
- Wax filler (90 Colors)
- Repair kit Profi
- Renewer oil for oiled and hardwax-oiled hardwood floors
- Protective wax for hardwood floors

Wax filler (90 Colors)

FIELD OF APPLICATION

Wax filler is designed to quickly remove any mechanical damage and other small defects of the surface that appear during the manufacturing, storage and transportation of flooring, as well as for renovation of small knots on wooden pieces.

Wax fillers are used on lacquer, enamel, oil or wax covered surfaces, as well as on PVC-finished surfaces.

Supplied in different shades (90 Colors).

Packing: 1 pcs.



Repair Kit Profi

FIELD OF APPLICATION

Renovation kit is a full set of tools designed to perform the complete and professional renovation of minor flaws, scratches and other defects that appear during the hardwood flooring lifetime.

KIT COMPOSITION:

- 22 bars of hard wax of different wood shades;
- 1 non-abrasive plastic trowel to work with renovation wax;
- 1 wax melter (battery power supply), 2 AA batteries in set;
- 1 concealer stick with brush to seal and protect the restored area;
- 1 sponge to polish the restored area.



Wood stain (47 Colors)

FIELD OF APPLICATION

Wood stain is designed to tone insignificant wooden surfaces out: furniture, stairs, tabletops and other wooden items. It can be used to renovate small wear areas, minor flaws

METHOD OF APPLICATION

Important! Ready to use, does not have to be dissolved.

Before using, stir thoroughly. Wood stain shall be applied to the preliminary sanded surface. Apply wood stain with brush, rags, applicator roll, disperse it or dip the element to be coated. To strengthen the shade, repeat the steps 2 - 3 times.

Time between applications: 15 min.

Wood stain consumption: 30 - 50 ml/m² of surface.

Once the wood stain is dry, the wood surface shall be protected with any lacquer-and-paint product.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Pigments, isopropanol, methoxypropanol.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! For intended use only. Avoid contact with mucous membranes. Wear suitable rubber gloves when using the wood stain. Keep out of the reach of children.

DISPOSAL: Dispose of the preliminary water-soaked rags with wood stain remains in the tightly closed container.

Protective wax for hardwood floors

FIELD OF APPLICATION

Protective wax for oiled and hardwax-oiled floors renovation is developed for regular and periodic renovation of hardwood flooring finished with any oil-containing finishes (natural oils, hardwax-oil, UV-oil).

METHOD OF APPLICATION AND TECHNICAL INFORMATION check p. 21



Renewer oil for oiled and hardwax-oiled hardwood floors

FIELD OF APPLICATION

Renewer oil for oiled and hardwax-oiled hardwood floors is developed specifically for periodic renovation of hardwood flooring, furniture, stairs, wall panels finished with any oil-containing finishes (natural oils, hardwax-oil, UV-oil) and restoration of protective properties.

METHOD OF APPLICATION

Important! Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Clean the floor with the oil and hard wax-covered flooring cleaner and leave until completely dry. Stir the oil jar thoroughly.

Manual application: Apply the oil to the renovated flooring surface with a resin trowel. When applied, rub the oil with clean, non-colored rags, remove the oil excess with rags to avoid heavy stains and beads.

Mechanical application: Apply the oil to the renovated flooring surface with a resin trowel. It is recommended to use a single-disk white pad buffing machine. Rub the floor using the buffing machine.

Oil consumption: 5 - 10 ml/m² of flooring surface.

Time to dry: 12 hours in ventilated room. Time before using floors not less than 24 hours. Maximal protective characteristics are available in a week.

Tools cleaning: Tools and dry oil remains can easily be cleaned with white spirit.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Natural oil, wax, desiccants, solvent.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! Avoid contact with mucous membranes. Wear suitable rubber gloves when using the oil. If underventilated, use a respiratory protection. Avoid release to the environment. Do not inhale oil fumes. For intended use only. Keep out of the reach of children. Dry film is safe and non-toxic.

DISPOSAL: Dispose of the preliminary water-soaked rags with oil remains in the tightly closed container.

Tinted oil for restoration of oiled and hardwax-oiled hardwood floors

FIELD OF APPLICATION

Tinted oil for restoration of oiled and hardwax-oiled hardwood floors is developed specifically for renovation of the wear layer of wooden surfaces (hardwood flooring, furniture, stains, wall panels) finished with any oil-containing finishes (natural oils, hardwax-oil, UV-oil).

METHOD OF APPLICATION

Important! Ready to use, does not have to be dissolved.

Clean the floor from dust and litter using a vacuum-cleaner. Clean the floor with the oil and hard wax-covered flooring cleaner and leave until completely dry. Stir the oil jar thoroughly.

Manual grinding: Apply the oil to the renovated flooring surface with a resin trowel. When applied, rub the oil with clean, non-colored rags, remove the oil excess with rags to avoid heavy stains and beads.

Mechanical grinding: Apply the oil to the renovated flooring surface with a resin trowel. It is recommended to use a single-disk white pad buffing machine. Rub the floor using the buffing machine.

Oil consumption: 5 - 10 ml/m² of flooring surface.

Time to dry: 12 hours in ventilated room. Time before using floors not less than 24 hours. Maximal protective characteristics are available in a week.

Tools cleaning: Tools and dry oil remains can easily be cleaned with white spirit.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Natural oil, wax, desiccants, solvent, pigments.

VOLUME: 0,75 l. Quantity in a pack: 9 pcs.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! Avoid contact with mucous membranes. Wear suitable rubber gloves when using the oil. If underventilated, use a respiratory protection. Avoid release to the environment. Do not inhale oil fumes. For intended use only. Keep out of the reach of children. Dry film is safe and non-toxic.

DISPOSAL: Dispose of the preliminary water-soaked rags with oil remains in the tightly closed container.



SYSTEMS FOR APPLICATION OF NEW (COMPLETE REPLACEMENT OF OLD) PROTECTIVE-DECORATIVE FINISHES (PROTECTIVE)

SYSTEMS FOR APPLICATION OF PROTECTIVE DECORATIVE LACQUER FINISHES

- Application of lacquer finish rated for an ordinary load (PH HOME)
- Application of lacquer finish rated for an augmented load (PH HALL)
- Application of lacquer finish rated for public places (PH HIGH TRAFFIC)
- Application of lacquer finish rated for sports halls in accordance with EN 14904 (PH SPORT)

SYSTEMS FOR APPLICATION OF PROTECTIVE DECORATIVE OIL-WAX FINISHES

- Application of colorless oil-wax finish (PS COLORLESS)
- Application of tinted oil-wax finish (PS COLOR)

System	Layout	Primer, consumption*	Toner/ marking paint	Finish, consumption
PH HOME		F01 Prime, 100 - 120 g/m ²		F11 Home, 100 - 120 g/m ² (consumption for one layer**)
PH HALL		F01 Prime, 100 - 120 g/m ²		F21 Hall, 100 - 120 g/m ² (consumption for one layer**)
PH HIGH		F01 Prime, 100 - 120 g/m ²		F31 High Traffic & Sport, 100 - 120 g/m ² (consumption for one layer**)
PH SPORT		F01 Prime, 100 - 120 g/m ²	Water-based polyurethane acrylic sports line marking Paint Coswick P71 Sport Marking (3 kg for a single full-size marking)	F31 High Traffic & Sport, 100 - 120 g/m ² (consumption for one layer**)
			2K polyurethane sports line marking Paint Coswick P72 Sport Marking (3 kg for a single full-size marking)	
PS COLORLESS				Hardwax-Oil for hardwood floors, 15 - 30 ml/m ² (consumption for one layer**)
PS COLOR			Tinted oil for hardwood floors, 15 - 30 ml/m ² (consumption for one layer)	Hardwax-Oil for hardwood floors, 15 - 30 ml/m ² (consumption for one layer**)

* - one layer is enough

** - it is recommended to apply two or three (if using under stressful conditions) layers

PROTECTIVE DECORATIVE COATINGS

Primer

- Water-based acrylic primer for hardwood floors COSWICK F01 PRIME

Water-based finish for hardwood floors

- Water-based polyurethane acrylic finish for hardwood floors COSWICK F11 Home
- Water-based polyurethane finish for hardwood floors COSWICK F21 Hall
- Water-based two-component polyurethane finish for hardwood floors COSWICK F31 High Traffic&Sport

Sports marking paint

- Polyurethane-acrylic sports marking paint COSWICK P71 Sport Marking (4 colors)
- 2K polyurethane sports line marking Paint Coswick P72 Sport Marking (4 colors)

Natural hardwood flooring oils and wax

- Hardwax-Oil for hardwood floors
- Tinted oil for hardwood floors (6 colors)

Outer finish

- Lasur

Water-based acrylic Primer for hardwood floors **Coswick F01 PRIME**

FIELD OF APPLICATION

Primer is used indoors as a first layer to finish the hardwood flooring, cork and board floors made from any wood species, improving adhesion characteristics and levelling the surface. To finish the following layers, any Coswick finish, as well as water-based hardwood flooring finishes from other manufacturers can be used.

METHOD OF APPLICATION

Preliminary works: Clean surface from dust and impurities, check if there are no spots of oil or wax to avoid the finish defects. Sand the surface with an abrasive material with grit of 120 - 150.

It is recommended to provide the following climatic conditions: temperature from +18 °C to +25 °C, relative air humidity 40 - 60 %. High temperature and low humidity cut the primer drying time, while the low temperature with the high humidity increases it. Lowest prime application temperature is +15 °C.

Important! Shake before using.

Application: Primer can be applied with an applicator roll for water-based materials, brush or trowel. It is recommended to use a trowel for wide-pore wood species. Apply the primer to the surface in uniform layer, avoiding the separate primer pile-ups.

When dried up, carry out the preliminary filing of the floor surface using the abrasive with grit of 150 and remove the dust. To achieve the best result, it is recommended to sand all intermediary layers.

Recommended consumption: 100 - 120 g/m² when using applicator roll.

Time to dry: Readiness to sand/apply a new layer - 1 hour.

Tools cleaning: Tools are easily cleaned with water. Remains of dry primer can be removed with acetone.

BENEFITS:

- Compatible with all water-based hardwood flooring finishes;
- Smooths the surface of the base layer and improves the adhesive characteristics increasing the quality of the following decorative finish;
- Fast-dry water-borne composition without solvents;
- Odourless;
- Non-toxic;
- Fire- and explosion-safe.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 STANDARD

COMPOSITION: Acrylic dispersion, cosolvent and functional additives.

PACKING: Jerrycans 2,5 kg, 5 kg, 10 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Expiry date: 12 months from the manufacturing date, when keeping in the intact manufacturing tight pack. Keep tightly closed at temperature from +5 °C to +25 °C. Keep container dry. Avoid exposure of direct sunlight and cold.

SAFETY REQUIREMENTS: For intended use only. Avoid contact with skin and mucous membranes. When working with primers that contain small amounts of hazardous substances, follow general safety measures. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Water-based polyurethane acrylic finish for hardwood floors **Coswick F11 HOME**

FIELD OF APPLICATION

Lacquer is used to finish hardwood, cork and board flooring from any wood species with an average exploitation rate indoors.

METHOD OF APPLICATION

Preliminary works: Clean the surface from dust and impurities, check if there are no spots of oil or wax to avoid the finish defects. Sand the surface with an abrasive material with grit of 120 - 150.

It is recommended to provide the following climatic conditions: temperature from +18 °C to +25 °C, relative air humidity 40 - 60 %. High temperature and low humidity cut the lacquer drying time, while the low temperature with the high humidity increases it. Thus, the risk of finish defects appearance is increasing too.

Lowest lacquer application temperature is +15 °C.

Important! Shake and insert the filter before using.

Application: Lacquer can be applied with an applicator roll for water-based materials or with brush. Apply the lacquer evenly to avoid the separate clusters of lacquer.

To achieve the even surface and improve the adhesion it is recommended to use the flooring primer "Coswick F01 Prime". When the first layer is dried up, carry out the preliminary filing of the floor surface using the abrasive with grit of 150 and remove the dust. To achieve the best result, it is recommended to sand all intermediary layers.

Recommended quantity of lacquer layers:

When using prime: One layer of primer "Coswick F01 Prime" and two layers of lacquer "Coswick F11 Home".

When applying the lacquer without primer: Three layers of lacquer "Coswick F11 Home".

Consumption: 100 - 120 g/m² for every layer.

Time to dry: Readiness to sand/apply a new layer - 2 - 4 hours. Light load - 24 hours. Full load - 7 days. It is recommended not to put any carpets or furniture, or use any detergents for the first 7 days.

Tools cleaning: Tools are easily cleaned with water. Remains of dry lacquer can be removed with acetone.

BENEFITS:

- Highly resistant to wear, grinding and scratches;
- High chemical resistance to domestic pollutants;
- Non-toxic;
- Water-borne, without solvents;
- Fire-safe and explosion-proof.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 STANDARD

COMPOSITION: Polyurethane-acrylic dispersion, coalescent, water and functional additives.

GLARE: Matte, semimatte.

PACKING: Jerrycan 2,5 kg, 5 kg, 10 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Avoid contact with skin and mucous membranes. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Water-based polyurethane finish for hardwood floors **Coswick F21 Hall**

FIELD OF APPLICATION

Lacquer is used to coat hardwood, cork and board flooring from any wood species with a high exploitation rate indoors.

METHOD OF APPLICATION

Preliminary works: Clean surface from dust and impurities, check if there are no spots of oil or wax to avoid the finish defects. Sand the surface with an abrasive material with grit of 120 - 150.

It is recommended to provide the following climatic conditions: temperature from +18 °C to +25 °C, relative air humidity 40 - 60 %. High temperature and low humidity cut the lacquer drying time, while the low temperature with the high humidity increases it. Thus, the risk of finish defects appearance is increasing too. Lowest lacquer application temperature is +15 °C.

Important! Shake and insert the filter before using.

Application: Lacquer can be applied with an applicator roll for water-based materials or with brush. Apply the lacquer evenly to avoid the separate clusters of lacquer.

To achieve the even surface and improve the adhesion it is recommended to use the flooring primer "Coswick F01 Prime".

When the first layer is dried up, carry out the preliminary filing of the floor surface using the abrasive with grit of 150 and remove the dust. To achieve the best result, it is recommended to sand all intermediary layers.

Recommended quantity of lacquer layers:

When using primer: One layer of primer "Coswick F01 Prime" and two layers of lacquer "Coswick F11 Home".

When applying the lacquer without primer: Three layers of lacquer "Coswick F21 Hall".

Consumption: 100 - 120 g/m² for every layer.

Time to dry: Readiness to sand/apply a new layer - 2 - 4 hours. Light load - 24 hours. Full load - 7 days. It is recommended not to put any carpets or furniture, or use any detergents for the first 7 days.

Tools cleaning: Tools are easily cleaned with water. Remains of dry lacquer can be removed with acetone.

BENEFITS:

- Highly resistant to wear, grinding and scratches;
- High chemical resistance to domestic pollutants;
- Non-toxic;
- Water-borne, without solvents;
- Fire-safe and explosion-proof.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 STANDARD

COMPOSITION: Polyurethane dispersion, coalescent, water and functional additives.

GLARE: Matte, semimatte.

PACKING: Jerrycan 2,5 kg, 5 kg, 10 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Avoid contact with skin and mucous membranes. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Water-based polyurethane 2K finish for hardwood floors **Coswick F31 High Traffic & Sport**

FIELD OF APPLICATION

Lacquer is used to finish hardwood, cork and board flooring from any wood species, as well as indoors in facilities with a high exploitation rate, gyms and public facilities.

METHOD OF APPLICATION

Preliminary works: Clean surface from dust and impurities, check if there are no spots of oil or wax to avoid the finish defects. Sand the surface with an abrasive material with grit of 120 - 150. It is recommended to provide the following climatic conditions: temperature from +18 °C to +25 °C, relative air humidity 40 - 60 %. High temperature and low humidity cut, and the low temperature with the high humidity increases the lacquer drying time. Thus, the risk of finish defects appearance is increasing too. Minimal lacquer use temperature is +15 °C. Shake before using, add a hardening compound at the ratio of 9:1, stir by shaking thoroughly for 1 minute and insert the filter. The mixture is suitable to apply for 4 hours. Lacquer can be applied with an applicator roll for waterborne materials or with brush. Apply the lacquer evenly to avoid the separate clusters of lacquer.

Application: To achieve the even surface and improve the adhesion it is recommended to use the flooring primer "Coswick F01 Prime".

When the first layer is dried up, carry out the preliminary filing of the floor surface using the abrasive with grit of 150 and remove the dust. To achieve the best result, it is recommended to sand all intermediary layers.

Recommended quantity of lacquer layers:

When using primer: One layer of flooring primer "Coswick F01 Prime" and two layers of lacquer "Coswick F31 High Traffic & Sport".

When applying the lacquer without primer: Three layers of lacquer «Coswick F31 High Traffic & Sport».

Consumption: 100 - 120 g/m² for every layer.

Time to dry: Readiness to sand/apply a new layer - 2 - 4 hours. Light load - 24 hours. Full load - 7 days. It is recommended not to put any carpets or furniture, or use any detergents for the first 7 days.

Tools cleaning: Tools are easily cleaned with water. Remains of dry lacquer can be removed with acetone.

BENEFITS:

- Highly resistant to wear, grinding and scratches;
- High chemical resistance to domestic pollutants;
- Water-borne, without solvents;
- Fire-safe and explosion-proof.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 STANDARD

COMPOSITION: Polyurethane dispersion, coalescent, water and functional additives.

GLARE: Matte, eggshell.

PACKING: Set of two components: component A - jerrycan 9 kg, component B - bottle 1 kg (variant 1) component A - jerrycan 4,5 kg, component B - bottle 0,5 kg (variant 2)

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Avoid contact with skin and mucous membranes. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Water-based polyurethane acrylic sports line marking paint **Coswick P71 Sport Marking**

FIELD OF APPLICATION

The paint is used to draw lines, marks, zones on sports unfinished wooden floors.
Paint is used indoors.

METHOD OF APPLICATION

Preliminary works: Clean the surface from dust and impurities. Degrease the surface. Sand the surface with an abrasive material with grit of 150 - 180. To achieve the even surface and improve the adhesion it is recommended to use the flooring primer "Coswick F01 PRIME". Once the primer is dry, grind the surface with an abrasive with abrasive grit of 150 - 180. Remove the dust.

Stir the paint before using.

Application: Apply with an applicator roll. Distribute evenly, avoid paint runs. Zones and lines shall be painted following the adhesive tape pattern on the floor. Once completed, remove the adhesive tape. Apply the lacquer Coswick F31 HIGH TRAFFIC & SPORT on surface. Distribute evenly, avoid lacquer runs. Grind the layers.

Recommended sports system:

One layer of flooring primer "Coswick F01 Prime"; one layer of lacquer "Coswick F31 High Traffic & Sport".
One or two layers of paint "Coswick P71 Sport Marking"; one or two layers of lacquer "Coswick F31 High Traffic & Sport".

Consumption: 100 - 160 g/m² for every layer.

Time to dry: After the lines have been painted: 1 - 2 hours.

After the zones have been painted: 3 - 4 hours.

BENEFITS:

- High wear resistance;
- Odourless;
- Does not contain organic solvents;
- Fire-safe and explosion-proof.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 AND DIN 18032-2, EN 14904 STANDARDS

COMPOSITION: Polyurethane-acrylic dispersion, cosolvent, water, pigments and functional additives.

PACKING: Bucket 1 kg, 3 kg.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.



2K polyurethane sports line marking paint **Coswick P72 Sport Marking**

FIELD OF APPLICATION

The paint is used to draw marking lines, zone limiting lines on sports wooded floors finished with UV-cured polyurethane-acrylic finishes or organic solvent based lacquers.
Paint is used indoors.

METHOD OF APPLICATION

Preliminary works: Clean the surface from dust and impurities. Degrease the surface. Stir before using, add a hardening compound at the ratio of 2:1 and stir by shaking thoroughly for 1 minute. The mixture is suitable to apply for 3 hours. If necessary, dilute the paint with Coswick solvent. Apply the paint evenly to avoid the separate clusters of lacquer. Zones and lines shall be marked using the special tape-measure Coswick. Immediately after the paint was applied, remove the tape measure.

Consumption: 100 - 160 g/m² for every layer.

Time to dry: From dust - 60 - 90 min. Full load - 2 days.

BENEFITS:

- Highly resistant to wear, grinding and scratches.

MEETS THE REQUIREMENTS OF TY BY 101040134.004-2015 AND DIN 18032-2, EN 14904 STANDARDS



Hardwax-Oil for hardwood floors and Tinted oil for hardwood floors

FIELD OF APPLICATION

Hardwax-oil for hardwood floors is used for protective-decorative finish of hardwood, cork and wooden flooring in private and public premises, furniture and other wooden items.

Oil deeply penetrates the wood fibre. Once dry, the oil-treated fibre creates a durable and wear-resistant layer. Due to its natural characteristics, the oil steeps the wood keeping the pores open and allowing the wood breathing.

The purpose of the tinted oil for hardwood floors is to create intense colors and protective-decorative finish for hardwood, cork and wooden flooring made from any wood type in private and public premises, furniture, stairs, tabletops and other wooden items.

METHOD OF APPLICATION

Preliminary works:

1. Sand the surface with an abrasive material with grit of 150 - 180.
2. Dedust the floor with a vacuum-cleaner.

It is recommended to provide the following climatic conditions: temperature from +18 °C to +25 °C, relative air humidity 40 - 60 %. It is necessary to ensure the good air flow during the whole application and drying process. Shake before using.

Application: It is recommended to apply the oil to the surface with a metal trowel, distributing it evenly on the surface. When applied, rub the oil with rags on the surface, removing the excess. To fasten the rubbing, it is recommended to use a single-disk white pad buffing machine. In 4 - 6 hours make sure that the surface is completely dry. The second layer can be applied at this moment. The second layer is applied in the same manner.

Consumption:

- 15 - 30 ml/m² for the first layer;
- 10 - 20 ml/m² for the second layer.

Time to dry:

- First layer - 4-6 hours.
- Second finishing layer - minimum 12 hours.

Tools cleaning: Tools and dry oil remains can easily be cleaned with white spirit.

BENEFITS:

- Easy to use;
- High resistance to wear;
- High chemical resistance to domestic pollutants;
- Adds antistatic, soil-repellency and water-proof properties.

MEETS THE REQUIREMENTS OF TY BY 10104-0134.002-2014 STANDARD

COMPOSITION: Natural oil, wax, pigments, desiccants, solvent.

PACKING: Bucket 3 l, 5 l. Jar 0,75 l.

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! For intended use only. Avoid contact with skin. To prevent the spontaneous combustion, keep the oil-soaked rags in tightly closed metal containers or under the water. Keep out of the reach of children.

DISPOSAL: This material and its container must be disposed of in accordance with the requirements of legislation on environmental protection and materials disposal.



Lasur

FIELD OF APPLICATION

Lasur is designed for finish and profilactic preservation of non-painted wooden structures (doors, windows, walls, decking plank, arbors, garden furniture, etc.), as well as for renovation of the wooden surfaces that were previously treated with similar products.

Lasur penetrates deeply into the wood, hardens it and creates the protective layer that guards the flooring against the wear. Finish does not crack and can be easily renovated. Accentuates the wood texture and adds lustre. Due to the use of anti-fungal additives, Coswick lasur is highly effective in use against the wide range of fungi that affect wood. Recommended for inner and outer finish. Service lifetime of lasur' protective properties - at least 2 years.

METHOD OF APPLICATION

Preliminary works: Painter surface shall be dry, dedusted and clean from any impurities. Shake before using. Lasur is ready to use, does not have to be dissolved.

Application: It is recommended to apply lasur on the treated surface with brush or roller distributing it evenly on the surface. In 4 - 6 hours make sure that the surface is completely dry. The second layer can be applied at this moment.

Consumption: 20 - 40 ml/m² for the first layer, 10 - 20 ml/m² for the second layer.

Time to dry: First layer - 4 - 6 hours. Second finishing layer - minimum 12 hours.

Tools cleaning: Tools and dry lasur remains can easily be cleaned with white spirit.

Note: Lasur shall be applied when dry. Light transparent tones provide an inconsiderable UV-protection. This is the reason why these tones are not recommended to be used on surfaces that are exposed to the direct sunlight. Once dry, the finished surface becomes glossy, and then matte.

BENEFITS:

- Protects the wood from UV-rays and weather impact;
- Protects from the mould and fungi exposure;
- Deep penetration;
- Keeps the natural look of the wood intact.



MEETS THE REQUIREMENTS OF TY BY 101040134.002-2014 STANDARD

COMPOSITION: Alkyd-polyurethane resin, natural wax, desiccants, light inhibitors, solvent, coloring agents (for toned lasur).

VOLUME: 0,75 l, 3 l, 5 l

EXPIRY DATE AND STORAGE CONDITIONS: Keep tightly closed at the temperature of +5 °C to +25 °C. Keep away from cold. If following, the expiry date is 12 months from the manufacturing date.

SAFETY REQUIREMENTS: Flammable! For intended use only. Avoid contact with skin and mucous membranes. Keep out of the reach of children.

DISPOSAL: After using, seal the empty container and dispose as a domestic garbage.



Coswick Hardwood Inc.
3615-9 Laird Rd., Mississauga, ON, Canada, L5L 5Z8
Tel. +1-905-569-3389, Fax: +1-905-569-9670, E-mail: mail@coswick.com

Coswick Ltd.
2B Kolasa Str, Zaslavl, Republic of Belarus 223 034
Tel. +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com